SAMSUNG

Bluetooth® Headset

WEP350

MOBILE ENHANCEMENT

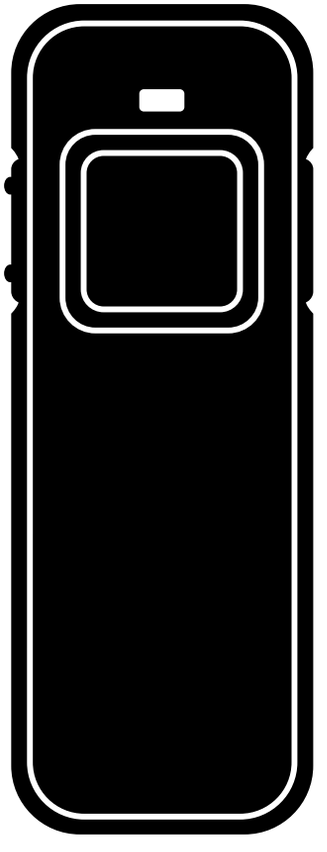

English / 中文

English 1
中文 13

Contents

Safety and usage information.....2
Your headset overview 3
Charging the headset.....4
Turning the headset on or off 5
Understanding various modes.....5
Pairing with your Bluetooth phone.....6
Using call functions.....7
Warranty and parts replacement.....8
Correct disposal of this product 10
Specifications.....11

English

Bluetooth® is a registered trademark of the Bluetooth SIG, Inc. worldwide. Bluetooth QD ID: B012997

Safety and usage information

- Never disassemble or modify your headset for any reason. Doing this may cause the headset to malfunction or become combustible. Bring the headset to an authorised service centre to repair it or replace the battery.
- When using your headset while driving, follow local regulations in the country or region you are in.
- Avoid storage at high temperatures (above 50° C/122° F), such as in a hot vehicle or in direct sunlight, as this can damage performance and reduce battery life.
- Do not expose the headset or any of its supplied parts to rain or other liquids.

At very high volumes, prolonged listening to the headset can damage your hearing.

Your headset overview

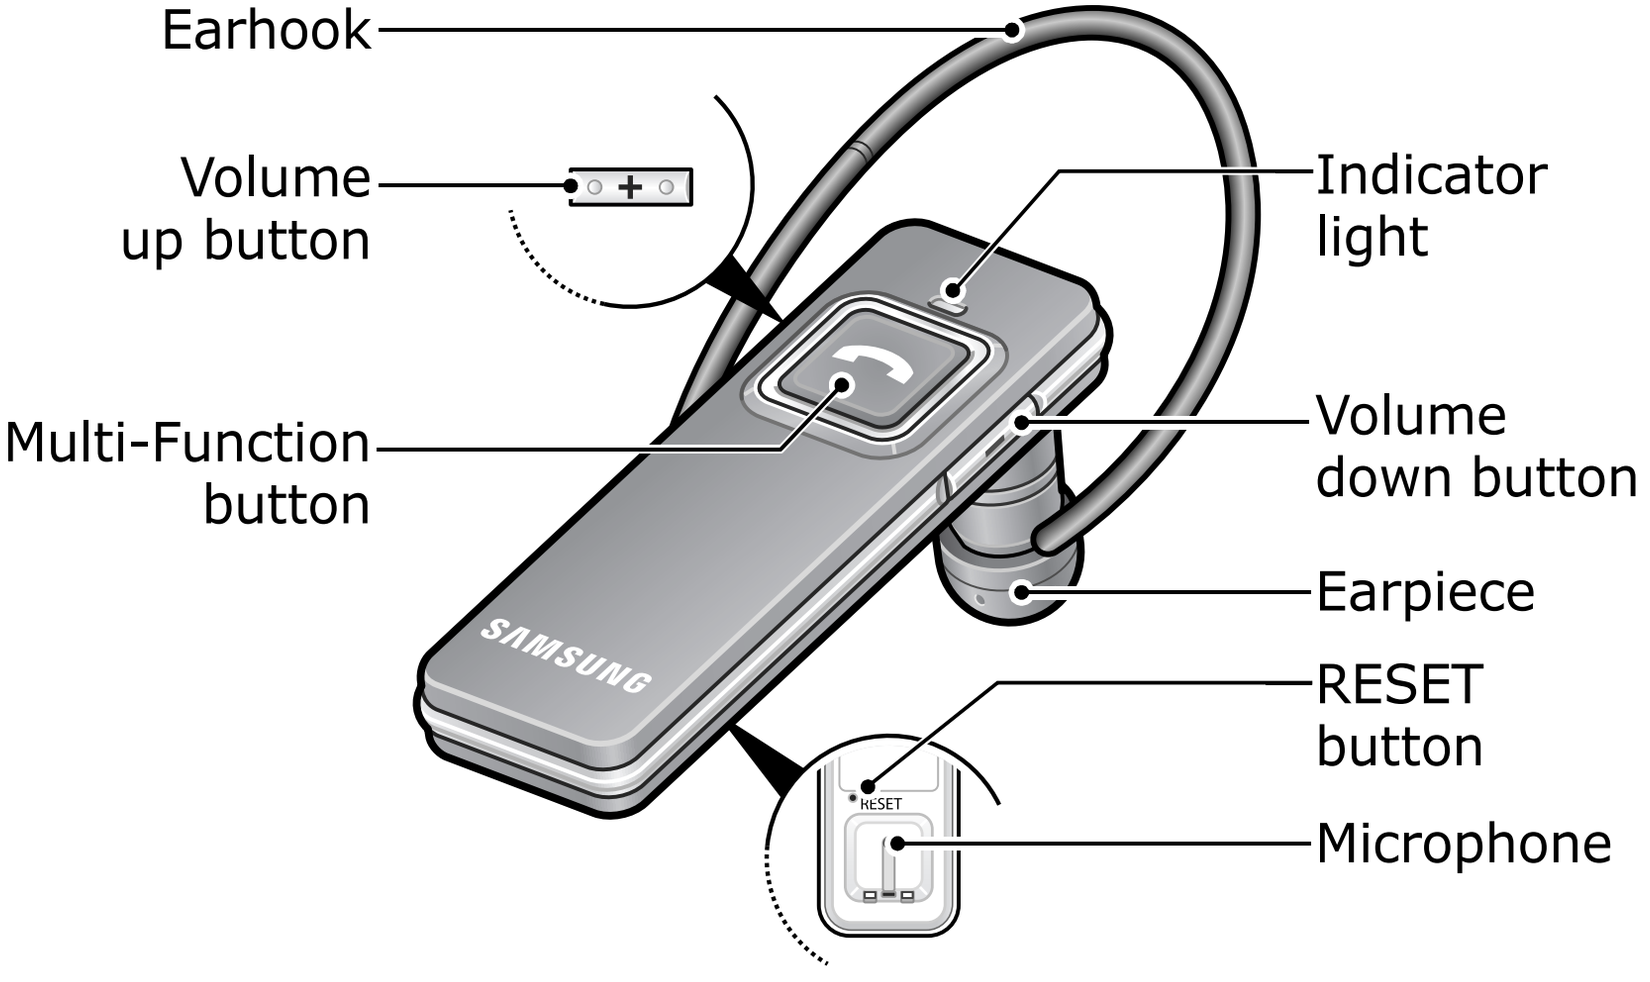

If your headset responds slowly, stops responding, or freezes, press the RESET button on the back of the headset with a pointed tool.

Charging the headset

1 Put the headset in the charging case.

2 Plug the adapter into the case's charging socket and the outlet.

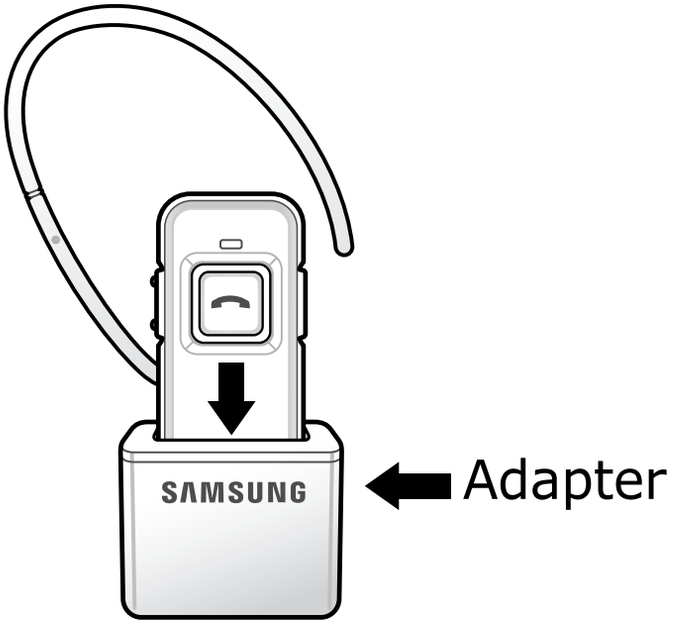

- When charging is complete, the indicator light will appear solid blue if the headset is off or a blue light will flash if the headset is on.
- During charging, the indicator light will appear solid red if the headset is off or red and purple lights will flash if the headset is on.

Do not attempt to charge the headset with anything other than the adapter provided.

Charging the headset will not disrupt the connection to the phone. You can use your headset right after removing the charging case.

Turning the headset on or off

To turn the headset on, press and hold the Multi-function button until the blue indicator light flashes 4 times.

To turn the headset off, press and hold the Multi-function button until both blue and red indicator lights flash.

Understanding various modes

- **Standby mode**: The headset is waiting for a call. The blue indicator light flashes every 3 seconds.
- **Active mode**: The headset has a call in progress. The blue indicator light flashes every 8 seconds.
- **Pairing mode**: The blue indicator light stays lit. You can discover and connect to your headset on your phone.
- **Low battery mode**: There is less than 10% of battery power left. The red indicator light flashes. You must recharge the battery.

Pairing with your Bluetooth phone

1 Enter Pairing mode.
   - Turn off your headset and press and hold the Multi-function button until the blue indicator light remains lit after blinking.
   - If you turn it on for the first time, it proceeds into Pairing mode immediately.

2 Search for and pair with your phone according to your phone's user guide. (Bluetooth PIN: 0000, 4 zeros)
   - If the pairing is successful, the blue indicator light will flash 10 times rapidly before entering Standby mode.
   - If the blue indicator light remains lit, retry pairing.

☑ When the headset and the phone are paired, the headset attempts to reconnect automatically each time it turns on. Otherwise, press the Multi-function button to reconnect.

Using call functions

Some functions may not be supported by your phone.

In Standby mode

Press the Multi-function button to:

- Answer an incoming call
- Redial the last number called

Press and hold Multi-function button to:

- Make a voice-activated call
- Reject an incoming call

Press and hold [+] and [-] at the same time to turn the indicator light on or off.

In Active mode

Press the Multi-function button to:

- End a call
- Transfer a call from the phone to the headset

Press and hold Multi-function button to:

- Place a call on hold
- Answer a second call
- Retrieve a call on hold

Press [+] or [-] to adjust the volume.

Press and hold [+] or [-] to turn the microphone off or on.

Warranty and parts replacement

Samsung warrants this product as free of defects in material, design and workmanship for the period of one year from the original date of purchase. (Depending on your country, the length of warranty may vary.)

If during the period of warranty this product proves defective under normal use and service you should return the product to the retailer from whom it was originally purchased or qualified service center. The liability of Samsung and its appointed maintenance company is limited to the cost of repair and/or replacement of the unit under warranty.

- The warranty is limited to the original purchaser
- A copy of your receipt or other proof of purchase is required for a proper warranty service
- The warranty is void if the serial number, date code label or product label is removed, or if the product has been subject to physical abuse, improper installation modification, or repair by unauthorised third parties
- Specifically exempt from any warranty are limited-life consumable components such as batteries and other accessories
- Samsung will not assume any responsibility for any loss or damage incurred in shipping. All repair work on Samsung products by unauthorised third parties voids any warranty

Correct disposal of this product

(Waste Electrical & Electronic Equipment)

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

Specifications

Item	Specifications and description
Bluetooth Version	2.0
Support Profile	Headset Profile, Hands-Free Profile
Operating range	Up to 30 feet (10 metres)
Maximum Standby Time	Up to 100 hours*
Maximum Active Time	Up to 5 hours*

*Depending on the phone type and usage, the actual time may vary.

SAMSUNG
ELECTRONICS

Declaration of Conformity (R&TTE)

We, **Samsung Electronics**

declare under our sole responsibility that the product

Bluetooth Headset : WEP350

to which this declaration relates, is in conformity with the following standards and/or other normative documents.

HEALTH	**EN 50371 : 2002**
SAFETY	**EN 60950 – 1 : 2001**
EMC	**EN 301 489 – 01 V1.6.1 (09–2005)**
	EN 301 489 – 17 V1.2.1 (08–2002)
RADIO	**EN 300 328 V1.7.1 (10–2006)**

We hereby declare that [all essential radio test suites have been carried out and that] the above named product is in conformity to all the essential requirements of Directive 1999/5/EC.

which will be made available upon request.
(Representative in the EU)

Samsung Electronics Euro QA Lab.
Blackbushe Business Park, Saxony Way,
Yateley, Hampshire, GU46 6GG, UK※

2007.09.28 (place and date of issue)

Yong-Sang Park / S. Manager (name and signature of authorised person)

※ **It is not the address of Samsung Service Centre. For the address or the phone number of Samsung Service Centre, see the warranty card or contact the retailer where you purchased your product.**

目錄

安全與使用資訊 14
頭戴式耳機概觀 15
耳機充電 16
開／關耳機電源 17
瞭解各種模式 17
與藍牙手機配對 18
使用通話功能 19
保固與零件更換 20
正確的產品廢棄方式 22
規格 23

Bluetooth® 係 Bluetooth SIC, Inc. 在全球的註册商標。Bluetooth QD ID：B012997

安全與使用資訊

- 請勿因任何原因拆解或修改您的耳機。這樣做可能會導致耳機故障或產生燃燒的危險。請將耳機送至授權服務中心維修或更換電池。
- 開車時如需使用耳機，請遵守所在國家或地區的法律。
- 避免將耳機放置在高溫（50º ／ 122º 以上）之處，例如高溫車內或日光直射處，否則可能會損害其性能或縮短電池壽命。
- 請勿讓耳機或任何隨附的零件淋雨或接觸其他液體。

使用耳機時，若長時間音量過高，可能會傷害您的聽力。

- 本機限在不干擾合法電臺與不受被干擾保障條件下於室內使用。

頭戴式耳機概觀

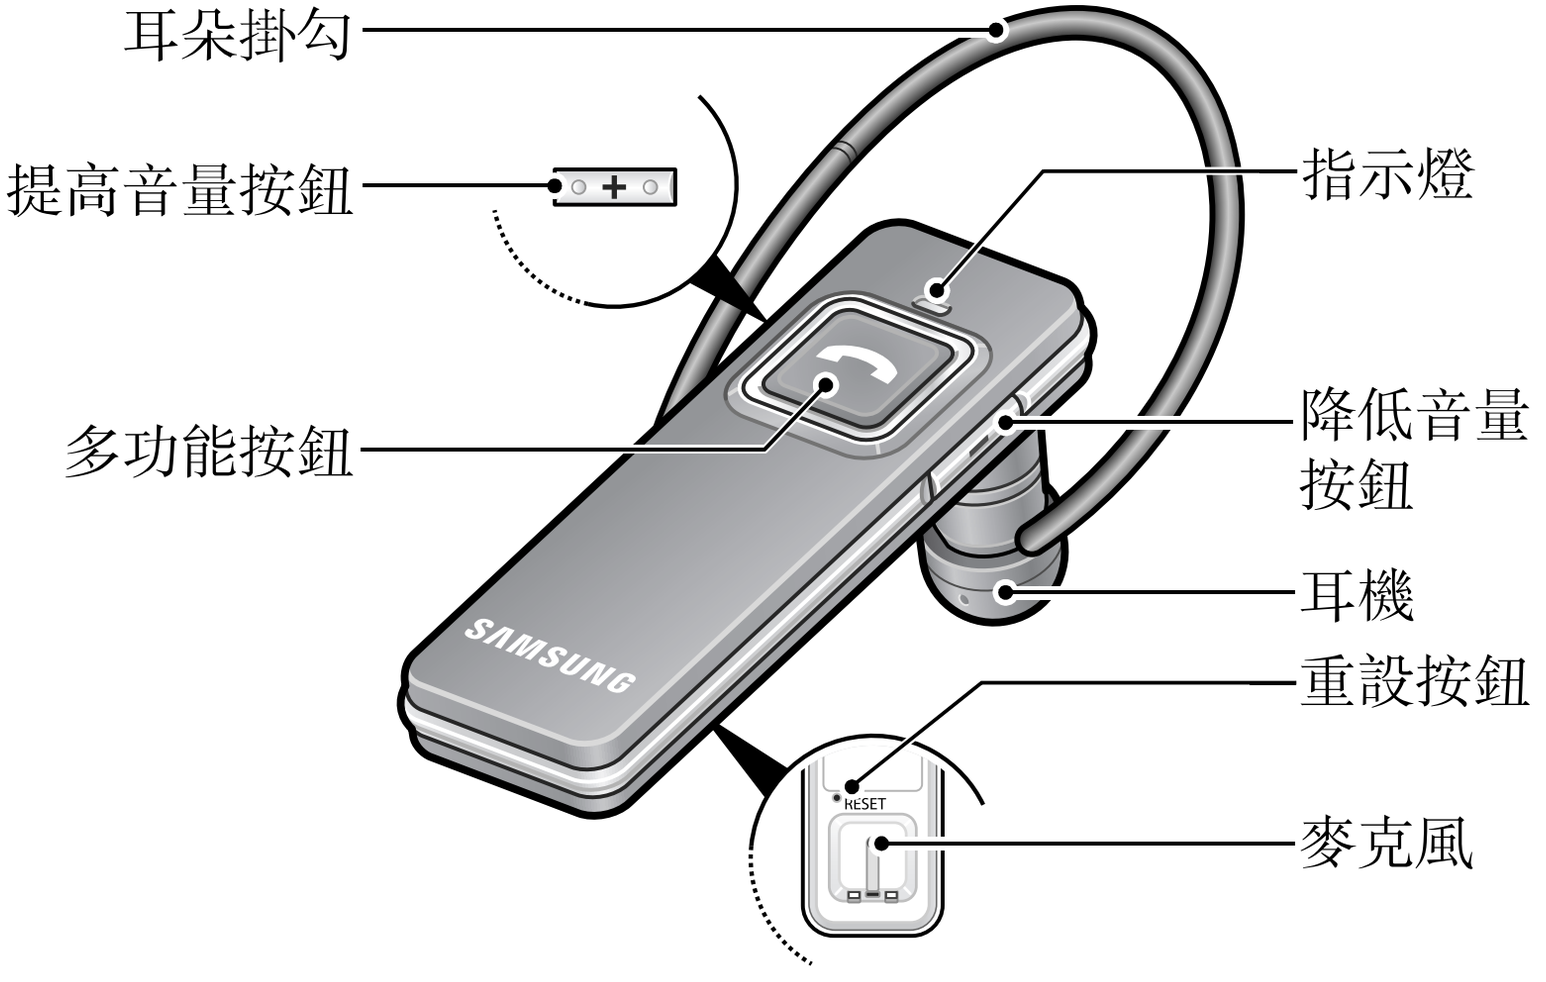

若您的耳機反應速度很慢、停止回應，或是中止回應，請使用尖銳工具按下耳機背面的重設按鈕。

耳機充電

1 將耳機放在充電盒中。

2 將多國電源轉接器插入充電盒的充電插孔與電源插座。

- 充電完成時，若耳機爲關閉狀態，指示燈會亮藍色；若耳機爲開機狀態，則會閃爍藍色。
- 充電時，若耳機爲關閉狀態，指示燈會亮紅色；若耳機爲開機狀態，則會閃爍紅色與紫色。

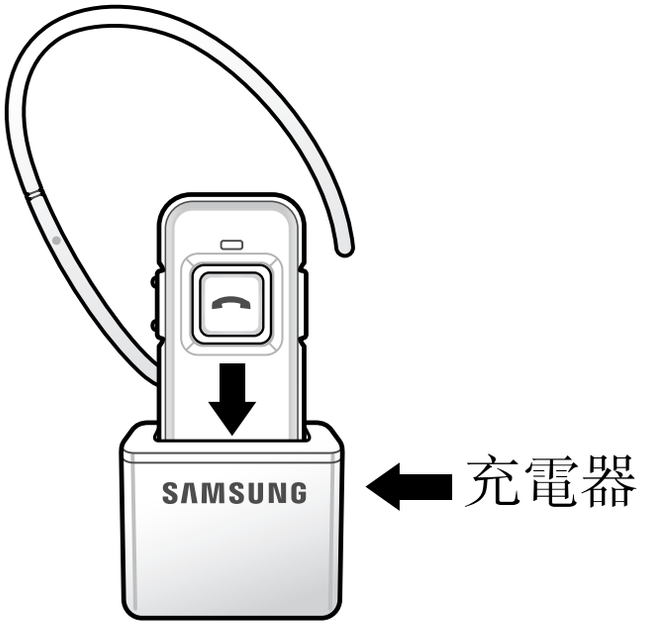

請勿試圖使用除了隨附的轉接器以外之任何轉接器進行充電。

耳機充電時並不會中斷與手機的連線。將耳機從充電盒中移除後，可立即使用您的耳機。

開／關耳機電源

如要啓動耳機，請按住多功能鈕直到藍色指示燈閃爍四次。

如要啓動耳機，請按住多功能鈕直到藍色與紅色指示燈閃爍四次。

瞭解各種模式

- **待機模式**：耳機正在等候來電。藍色指示燈每 3 秒會閃爍一次。
- **使用模式**：目前正使用耳機通話中。藍色指示燈每 8 秒會閃爍一次。
- **配對模式**：藍色指示燈亮起。您可以用手機搜尋耳機並進行連線。
- **低電力模式**：剩餘電力不到 10%。紅色指示燈閃爍。您必須將電池重新充電。

與藍牙手機配對

1 進入配對模式。

- 關閉您的耳機並按住多功能按鈕，直到藍色指示燈在閃爍後維持亮燈。
- 若您是第一次啓動，便會立即進入配對模式。

2 請依照您手機使用手册的説明，使用手機搜尋耳機並進行配對。（藍牙 PIN：0000，4 個零）

- 如果配對成功，藍色指示燈會在進入待命模式前閃爍 10 次。
- 若藍色指示燈亮起，請重新配對。

☑ 將耳機與手機配對完成時，耳機會在每次開機後嘗試與手機重新連線。如否，請按下 [多功能] 按鈕重新連線。

使用通話功能

您的手機可能不支援某些功能。

在待機模式中

按一下 [多功能] 按鈕可：

- 接聽來電
- 重撥最後一組撥出的號碼

按住 [多功能] 按鈕可：

- 撥打語音聲控撥號
- 拒絕來電

同時按住 [+] 及 [-] 鈕即可開啓或關閉指示燈。

在使用模式中

按一下 [多功能] 按鈕可：

- 結束通話
- 將通話從手機轉接至耳機

按住 [多功能] 按鈕可：

- 保留來電
- 接聽第二通來電
- 回到保留的來電

按下 [+] 或 [-] 可調整音量。

按住 [+] 或 [-] 鈕即可關閉或開啓麥克風。

保固與零件更換

Samsung 提供原購買日期起一年內的產品保固，使產品無材料、設計與工藝上的瑕疵。（視您的國家而定，保固時間的長度可能會有所差異。）

在保固期間，此產品若於正常使用與服務下證明有缺陷時，請將產品退回原出售之經銷商或合格的服務中心。Samsung 和指定維修公司的責任僅限於保固中的維修成本或元件更換。

- 保固服務僅適用於原消費者。
- 爲享有適當的保固服務，您必須提供收據或其他購買證明。
- 若產品序號、日期碼標籤或產品標籤遭到移除，或產品曾遭未經授權的協力廠商加以濫用、不當安裝、修改或維修，本公司則無責任提供保固
- 具有使用期限的耗材（如電池和其他配件）皆不在保固範圍內。
- Samsung 對於產品運送過程所造成的損失或損毀，不負任何損害賠償責任。對於由未經授權的協力廠商對 Samsung 產品所進行的任何維修工作，本公司不提供保固。

正確的產品廢棄方式



(廢棄的電機與電子設備)

顯示於本產品或其印刷品上的此標記意指當產品不堪使用時，不得將產品與其他家庭廢棄物一同丟棄。

爲避免未受管理的廢棄物對環境或人體健康造成可能的傷害，請將本產品與其他廢棄物分類並妥善回收，以促進材料資源的再利用。

有關產品安全回收的地點與方法等細節，請一般家庭使用者洽詢產品零售商或當地政府機構。

如爲企業使用者，請洽詢供應商，並確認購買合約的條款與條件。請勿將本產品與其他商用廢棄物混合丟棄。

規格

項目	規格與說明
藍牙版本	2.0
支援的設定檔	耳機設定檔（Headset Profile）、免持聽筒設定檔（Hands-Free Profile）
運作範圍	最遠達 30 呎（10 公尺）
最長待機時間	最長達 100 小時 *
最長使用時間	最長達 5 小時*

* 視手機的類型和使用狀態而定，實際時間可能有所不同。

MOBILE ENHANCEMENT

Printed in Korea
SEC Code: GH68-18516A
Code No.: CBAAG-00045
05/2008. Rev. 1.0

World Wide Web
http://www.samsungmobile.com